

Quality.  
Tradition.  
Design.

*Caravan -*

# Awnings

2017





## Welcome to Brand

The awning is a central holiday location. In the mornings for a comfortable breakfast. At midday as a meeting point and play area for the children, and as a shady spot on hot days. And in the evenings for sitting convivially with friends.

Quality. Tradition. Design. These three terms have characterised the development of our products for 65 years now. With our extensive range and its four product groups, we offer awnings to meet every requirement. The categories "Travel", "Comfort" and „Premium“ offer a wide selection for the

touring, seasonal and all-year-round camper with the corresponding possible material combinations.

On the following pages you will find information on every single tent. With clear comparison tables to make it easier to find the ideal awning for your requirements.

We hope you have fun reading and finding out more.

Your  
Holger Jan Brand



### Travel

Awnings made from lightweight, hardwearing materials and with an equipment which makes travelling easy and pleasant.

	Material	Page
<b>VENETO</b> Depth approx. 240 cm	A	10/ 11
<b>SAFIR TL 240</b> Depth approx. 240 cm	A	12/ 13
<b>SAFIR TL 280</b> Depth approx. 280 cm	A	12/ 13
<b>ARCADE 240</b> Depth approx. 240 cm	A	14/ 15
<b>ARCADE 280</b> Depth approx. 280 cm	A	14/ 15
<b>SUPRA</b> Depth approx. 250-280 cm	A	31
<b>XPRESS</b> Depth approx. 285 cm	A	32/ 33



### Comfort

These tents stand out for more living comfort and safety, numerous usage variants and comprehensive series equipment.

	Material	Page
<b>FINO 240</b> Depth approx. 240 cm	A	16/ 17
<b>FINO 300</b> Depth approx. 300 cm	A	16/ 17
<b>TARIFA 240</b> Depth approx. 240 cm	C	18/ 19
<b>TARIFA 280</b> Depth approx. 280 cm	C	18/ 19
<b>PAMIR 'S'</b>	D	30



### Premium

These tents offer absolutely everything. High-quality finished materials, stability and expertise in detail are all standard in this class.

	Material	Page
<b>RIOGRANDE 240</b> Depth approx. 240 cm	A	20/ 21
<b>RIOGRANDE 280</b> Depth approx. 280 cm	A	20/ 21
<b>PALAZZO 240</b> Depth approx. 240 cm	C	22/ 23
<b>PALAZZO 280</b> Depth approx. 280 cm	C	22/ 23
<b>MAGELLAN 300</b> Depth approx. 300 cm	A	24/ 25
<b>CASTELLO</b> Depth approx. 240 cm	B	26/ 27
<b>FORUM</b> Depth approx. 250 cm	B	28/ 29



### Sunroofs

	Material	Page
<b>TOURING PREMIUM</b>	A	34/ 35
<b>SUNNY SD</b>	A	36
<b>RONDO</b>	A	37
<b>SOLAIR</b>	A	38
<b>PARASOL XL</b>	A	39
<b>PARASOL HD</b>	A	40/ 41

#### Combinations of materials:

<b>A</b>	Roof: Ten Cate All-Season Side-wall: Ten Cate All-Season Front-wall: Ten Cate All-Season
<b>B</b>	Roof: PVC - coated from inside and outside Side-wall: Ten Cate All-Season Front-wall: Ten Cate All-Season
<b>C</b>	Roof: PVC - coated from inside and outside Side-wall: PVC - coated from inside and outside Front-wall: Ten Cate All-Season
<b>D</b>	Roof: PVC - coated from inside and outside Side-wall: PVC - coated from inside and outside Front-wall: PVC - coated from inside and outside



### Before you leaf through...

<b>Awning depth 240 / 280 / 300</b> A lot of awnings can be delivered alternatively in awnings depths of 240 cm, 280 cm or 300 cm. The weight of the 280 cm and 300 cm deep awnings is higher than the weight of the 240 cm deep awnings.
<b>Sales prices</b> The sales prices for awnings and sun-roofs are shown on page 50 and 51. The prices are in EURO and include the current VAT.
<b>INFO-PROFILE page</b> Important detailed information on the individual awning models can be found on the INFO-PROFIL page on the right of the rear cover page. hook: forms part of the equipment/contents of the awning no hook: does not form part of the equipment/contents of the awning

## Ten Cate 'All Season'

### The one-side coated synthetic material

A high-quality, tightly woven polyester fibre forms the basis for this tent material. This is fungicidal and water-repellent and acrylic-coated on the outside. For our awnings we use the qualities 'TC-Residential', 'TC-Touring 240' or 'TC-TOURING 180'.

### Properties:

The fabric is relatively robust with low weight (180 g/m<sup>2</sup> – 290 g/m<sup>2</sup>). It is very easy to tension, ensures high weather resistance and colour fastness, is printable and creates no odour.

### Less condensation:

The fabric is significantly less susceptible to condensation, because the fabric on the uncoated inner side can absorb moisture.

### Cleaning:

The cleaning ability is good, although not all conventional cleaning agents can be used.

### Ventilation and stress:

Good awning ventilation is important. The material is generally more sensitive with regard to mechanical and year-round stress.

### Stress and Use

A fabric of this type is used mainly for touring and seasonal tents, depending on weight and quality.



## PVC fabric

### Robust and heavy

The emphasis here is on the PVC coating applied on both sides.

### Properties:

PVC fabric is very heavy in comparison to other tent fabrics (380 g – 600 g/m<sup>2</sup>) and therefore also very robust. It is therefore also used for truck tarpaulins. It is however also inflexible and therefore more difficult to tension.

### Condensation:

A tent of PVC fabric allows the formation of heavy condensation, since there is no breathing on the part of the fabric.

### Cleaning:

PVC fabric is very easy to clean.

### Stress and use:

Due to its resistance to rotting, the fabric is suitable especially in the roof area for tents which remain up throughout the year, and everywhere where there is constant contact with water (spray walls, earth strip).

**Your BRAND specialist dealer will be happy to show you our sample book, Caravan awnings 2017. Here you will find the materials used for almost all BRAND awning modules.**

### Roof: pole pins



... (always series equipment) facilitate tent erection and stabilise the roof surface.

### Roof: canopy depth



... of approx. 30 cm offer optimum weather protection.

### Roof: hollow seam tabs



... in the awning roof are fitted as standard. Awning pole reinforcement is also supplied with many models.

### Side: zip-fasteners




... from leading manufacturers (e.g. YKK) guarantee maximum convenience of use.

### Side: wind protection gusset



... are supplied as standard, and offer optimum wind protection and a close fit even for aerodynamic caravan designs.

### Side: fabric cover

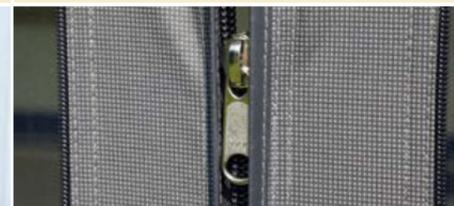

... of the front wall and side wall zip-fasteners. Series equipment with many models

### Windows: top ventilation



... adjustable closing with fabric cover and zip-fasteners (see Info-profile Page 52).

### Windows: 3-piece window



Gauze/film window + film cover + fabric cover. Series equipment with many models.

### Windows: window flaps




Important for awnings for seasonal and all-year use (see individual model description).

### Interiors: SHS-channel cord



All models with the SHS channel cord for use of the "Screwless retaining eyes system" and for the attachment of the inner lining (both optional).

### Interiors: hollow seam tabs

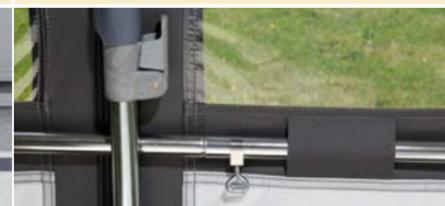

... for almost all front walls and side walls for the use of balconies and storm poles (accessories).

### Interiors: velcro strips



... for windproof attachment of hurricane supports - (see individual model description).

### Floors: the 'multi-function strip'



... enables individual tensioning and the easy replacement of defective tensioning rings.

### Floors: storm tensioning tabs




... in the front and side walls (see Info-profile Page 52).

### Floors: 3-way earth strip



... for a 'neat' floor connection - Series equipment with most models.

# Tent consultation

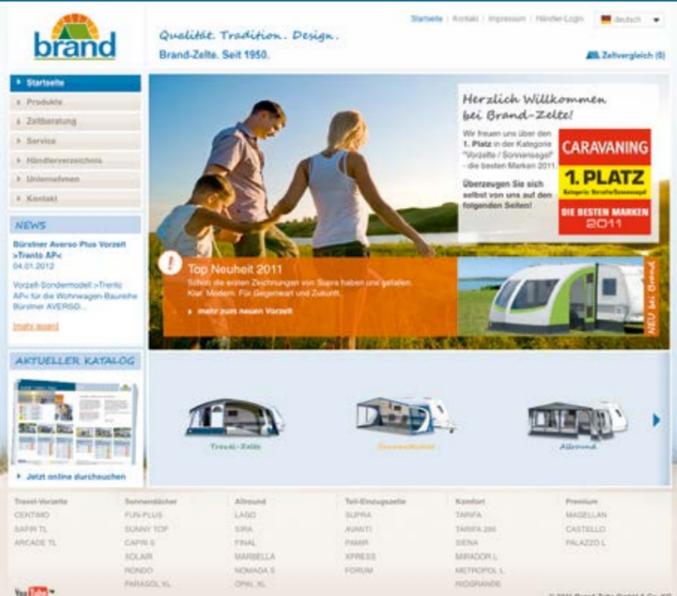


[www.brand-camping.com](http://www.brand-camping.com)

Which tent for which purpose?  
Tips on model selection.  
Care instructions, size calculator.

Important, interesting, clearly prepared information can be found on the brand website at:

[www.brand-camping.com](http://www.brand-camping.com)

☑ = Standard

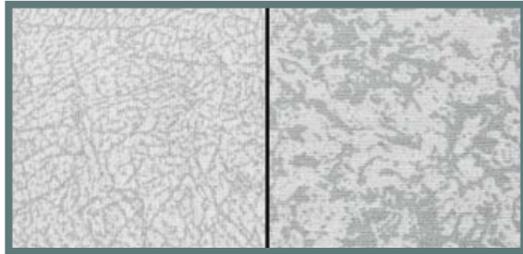

The inside of the roof is decoratively printed. Print and design according to pattern book 2017.



Externally, the roof is additionally treated with a metallic coating.



The front wall is designed in several parts, so that the door can be placed in different positions.



The door is designed as an archway and thus creates a stable door effect.



The door in a roll-up design.

Veneto  
Safir TL 240/280  
Arcade 240/280  
Fino 240  
Fino 300  
Tarifa 240/280  
Riogrande 240/280  
Palazzo 240/280  
Magellan 300  
Castello  
Forum  
Pamir 'S'

☑	☑	☑	☑	☑		☑		☑				
---	---	---	---	---	--	---	--	---	--	--	--	--

☑	☑	☑	☑	☑		☑		☑				
---	---	---	---	---	--	---	--	---	--	--	--	--

☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑		
---	---	---	---	---	---	---	---	---	---	---	--	--

☑	☑	☑	☑	☑		☑		☑				☑
---	---	---	---	---	--	---	--	---	--	--	--	---

					☑		☑		☑	☑		
--	--	--	--	--	---	--	---	--	---	---	--	--



Panorama windows: extra windows of ventilation gauze with matt film flap.



In both side walls 3-part windows: 1/2 ventilation gauze with clear film flap plus a complete exterior flap.



Top ventilation can be closed to protect against draughts in stormy weather.



A flap covers the zips in the front wall but not the window-flap zips



The in the canopy are for anchoring the canopy reinforcement (standard according to model).

Veneto  
Safir TL 240/280  
Arcade 240/280  
Fino 240  
Fino 300  
Tarifa 240/280  
Riogrande 240/280  
Palazzo 240/280  
Magellan 300  
Castello  
Forum  
Pamir 'S'

		☑	☑	☑		☑		☑	☑			
--	--	---	---	---	--	---	--	---	---	--	--	--

						☑		☑			☑	
--	--	--	--	--	--	---	--	---	--	--	---	--

			☑	☑		☑	☑	☑	☑	☑		
--	--	--	---	---	--	---	---	---	---	---	--	--

								☑	☑	☑	☑	
--	--	--	--	--	--	--	--	---	---	---	---	--

☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑		
---	---	---	---	---	---	---	---	---	---	---	--	--

☑ = Standard



The front walls are provided with tongues to take additional clamping rods / balcony rods.

Model	Veneto	Safir TL 240/280	Arcade 240/280	Fino 240	Fino 300	Tarifa 240/280	Riogrande 240/280	Palazzo 240/280	Magellan 300	Castello	Forum	Pamir 'S'
Feature	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	



The curtain roller fixings ensure reliable and convenient operation.

Feature	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑
---------	---	---	---	---	---	---	---	---	---	---	---	---



The multi-function strip is an additional convincing detail in the Brand design (see also details on page 43).

Feature	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑
---------	---	---	---	---	---	---	---	---	---	---	---	---



The triple ground strip: outside + multi-function strip + inside. A ground strip you can rely on.

Feature	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑
---------	---	---	---	---	---	---	---	---	---	---	---	---



The storm lashing straps on front and side walls: well prepared for unpleasant weather.

Feature	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑
---------	---	---	---	---	---	---	---	---	---	---	---	---



The Velcro strips for stable connections of the front and side walls with the erecting poles.

Model	Veneto	Safir TL 240/280	Arcade 240/280	Fino 240	Fino 300	Tarifa 240/280	Riogrande 240/280	Palazzo 240/280	Magellan 300	Castello	Forum	Pamir 'S'
Feature	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	



The wind screening wedge prevents draughts and optimises the fit with aerodynamic caravans

Feature	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	
---------	---	---	---	---	---	---	---	---	---	---	---	--



The poles all have PowerGrip as standard. For its advantages, see page 46.

Feature		☑	☑	☑	☑		☑	☑	☑	☑		
---------	--	---	---	---	---	--	---	---	---	---	--	--



Supplied with canopy reinforcement.

Feature			☑	☑	☑		☑	☑	☑	☑	☑	
---------	--	--	---	---	---	--	---	---	---	---	---	--

Heavy-duty zips for all wall connections

Feature	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑
---------	---	---	---	---	---	---	---	---	---	---	---	---

Additional roof weather-strip to permit use of the optional SHS system (see page 47)

Feature	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑
---------	---	---	---	---	---	---	---	---	---	---	---	---

Coated, wipe-clean edging strips

Feature	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑
---------	---	---	---	---	---	---	---	---	---	---	---	---



Photo size 21

### The benefits to you:

- Roof metallic coated on outside, inner side with decorative print. Side wall material also with decorative print
- Four possible entrance / exit variants in the front and side walls.
- Each side wall with a large ventilation windows.
- Front wall halves can be folded back to balcony trim.



▲ ... entrance positioned at the right with the aid of the exchangeable front wall halves.



▲ ... front wall halves folded back to balcony trim.



▲ ... here as a partial sunroof with one corner protected against the wind.



▲ ... an optical highlight: side wall material with print.

## VENETO

This awning model offers everything you need day-to-day on a camping holiday: all important equipment details as with the "great" and long-proven materials from TenCate. The five individual tent sections (roof, two side and two front wall elements) are easy

to handle and simple to stow away for the journey. The assembly and dismantling is equally uncomplicated.

### Sizes available:

Sizes available	05	06	07	08	09	10	11	12	21	13	31	14	41	15	16
A-Measurement in cm	748-773	774-798	799-823	824-849	850-876	877-897	898-917	918-938	939-958	959-977	978-1001	1002-1025	1026-1051	1052-1075	1076-1095
Approx. weight in kg	31,4	31,9	32,4	32,9	33,4	41,9	42,9	43,4	43,9	44,4	44,9	45,4	45,9	46,4	52,3
Number of awning pieces	5	5	5	5	5	5	5	5	5	5	5	5	5	5	9

### Technical details:

┌ Poles:

Steel poles, Ø 25 x 1 mm.

▣ Awning depth:

approx. 240 cm

▤ Roof:

TC-TOURING 240  
Metallic-coated on outside. Inner side with decorative print. Reduced condensation formation. Without seam.

▥ Side wall:

TC-TOURING 240  
Coated on outside. For a pleasant room atmosphere.

▧ Front wall:

TC-TOURING 180  
Coated on outside. For a pleasant room atmosphere.

Info-Profile: page 52 →

# SAFIR TL 240 / SAFIR TL 280

Comfortable. Light. And with a standard aluminium-Powergrip frame.



Photo size 21

## The benefits to you:


- Roof metallic coated on outside, inner side with decorative print.
- All front wall elements are exchangeable. Each sidewall has a door.
- The front wall elements can be folded back to balcony trim.
- Each side wall with a large ventilation windows.



▲ ... PowerGrip system as standard equipment.



▲ ... entrance at the right. 3 frontwall elements as balcony.

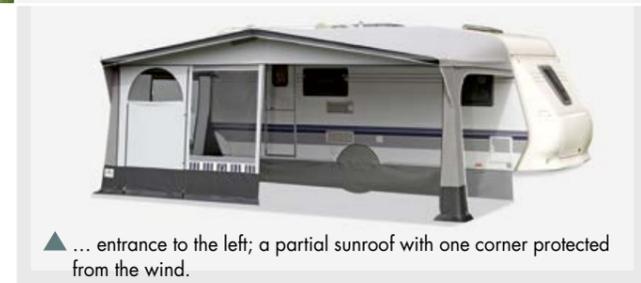

▲ ... entrance to the left; a partial sunroof with one corner protected from the wind.




▲ ... remove the 4 wall sections, the awning is turned into a stable sunroof.

## SAFIR TL

Every kilogram saved helps to avoid exceeding the maximum loading weight. All-Season-Touring fabric from TenCate, specially designed for touring camping, is lightweight, but nevertheless robust and durable.

The ø 28 mm light aluminium pole with the PowerGrip system supplied as standard reduces the weight even further. All front wall elements are exchangeable. Variable seating corner and front entrance.

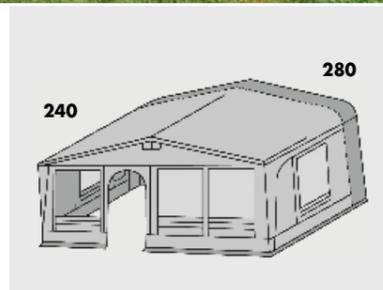

▲ Available in 2 awning depths (240 cm or 280 cm)

## Sizes available:

Sizes available	08	09	10	11	12	21	13	31	14	41	15
A-Measurement in cm	824-849	850-876	877-897	898-917	918-938	939-958	959-977	978-1001	1002-1025	1026-1051	1052-1075
Approx. weight in kg	27,5	28	33	33,5	34,5	35	35,5	36,5	37	37,5	38,5
Number of awning pieces	7	7	7	7	7	7	7	7	7	7	7

## Technical details:

### Poles:

Aluminium poles, Ø 28 x 1 mm, with PowerGrip

### Awning depth:

approx. 240 cm or 280 cm

### Roof:

TC-TOURING 240 Metallic-coated on outside. Inner side with decorative print. Reduced condensation formation. Safir TL 280 with seam.

### Side wall:

TC-TOURING 180 Coated on outside. For a pleasant room atmosphere.

### Front wall:

TC-TOURING 180 Coated on outside. For a pleasant room atmosphere.

Info-Profile page 52 →

# ARCADE 240 / ARCADE 280

A real eye-catcher on any camping site !!



Photo Size 21

## The benefits to you:

- Roof metallic coated on outside, inner side with decorative print.
- The interchangeable front wall sections allow variable positioning of the entrance.
- Optimum cross-ventilation thanks to large gauze windows in the side walls and in the front walls.
- A cosy living atmosphere with curtains in the front and side walls and a generous sense of space due to the arched shape of the pole structure.



▲ ... front wall sections interchanged. Left front wall folded back to balcony trim.



▲ ... right front wall and right side removed.



▲ ... both front walls removed, protection against the wind.



▲ ... can be used as a sun roof.

## ARCADE The trendsetter.

With the 4th generation of the ARCADE, we offer even more usage benefits. The front wall is designed as a replaceable wall, which enables two different door positions. In addition to the generous ventilation windows in the front wall, the side walls are now also equipped with closable gauze ventilation flaps. The roof fabric is

metallic-coated with a decorative print on the inner side. The innovative aluminium pole is equipped as standard with the PowerGrip system. For camping in warm holiday regions, a matching rounded sunroof (Type 'Rondo', see page 37) is also available as an accessory.



▲ Available in 2 awning depths (240 cm or 280 cm)



▲ ... side wall material partly with 'Metallic-pearl-effect'.

## Sizes available:

Sizes available	09	10	11	12	21	13	31	14
A-Measurement in cm	850-876	877-897	898-917	918-938	939-958	959-977	978-1001	1002-1025
Approx. weight in kg	38,8	39,3	39,7	40,0	40,5	41,0	41,5	42,0
Parties	5	5	5	5	5	5	5	5

A 28mm steel frame can be delivered alternatively without extra price.

## Technical details:

### Poles:

Aluminium poles, Ø 28 x 1 mm with PowerGrip and canopy reinforcement.

### Awning depth:

approx. 240 cm or 280 cm

### Roof:

TC-TOURING 240 Metallic-coated on outside. Inner side with decorative print. Reduced condensation formation. Arcade TL 280 with seam.

### Side wall:

TC-TOURING 180 Coated on outside. For a pleasant room atmosphere.

### Front wall:

TC-TOURING 240 Coated on outside. For a pleasant room atmosphere.

Info-Profile Page 52 →

# FINO 240 / FINO 300

Maximum flexibility due to the element front wall.



Photo size 21

## The benefits to you:

- Roof metallic coated on outside, inner side with decorative print. Roof in "TC-Residential"-quality. Side wall material in 240 quality.
- Variable door design in the front: all elements are individually interchangeable.
- Two closable ventilation windows and a closable top ventilation create a perfect atmosphere in the awning.
- Both panorama comfort windows of the side walls are fitted with curtains for that homely atmosphere.



▲ ... Front wall parts changed over, door at centre / right.



▲ ... Door position fully to the left, two elements folded down to form a balcony (balcony poles from our accessories), side entrance at right opened.



▲ ... use one section of the awning to protect one corner against the wind.



▲ ... Door to the extreme right. An annex provides additional storage or sleeping room.

## FINO A real All-rounder.

For our FINO model, we have chosen the roof material "TC-Residential" and for the side wall the material TC-Touring 240. These are appropriate qualities for a seasonal camping also. It is also equipped with an element front wall. You can therefore position the entrance as required by the

setup area. With the panorama comfort window, the separate and closable ventilation windows in the side wall and the closable top ventilation, you are perfectly prepared for any type of weather. The curtains for the front and side wall windows lend a cosy atmosphere.



▲ Available in 2 awnings depths (240 cm or 300 cm).

Please note:  
 Fino 240: steel poles, Ø 25 x 1 mm, with PowerGrip and canopy reinforcement.  
 Fino 300: steel poles, Ø 28 x 1 mm, with PowerGrip and canopy reinforcement.

## Sizes available

The model FINO 300 is available from size 09 to size 16.

Sizes available	09	10	11	12	21	13	31	14	41	15	16	17	18	19	GX
A-Measurement in cm	850-876	877-897	898-917	918-938	939-958	959-977	978-1001	1002-1025	1026-1051	1052-1075	1076-1095	1096-1115	1116-1135	1136-1155	1156-
Approx. weight in kg	39,9	49,5	49,9	50,7	51,4	51,8	52,1	53	53,6	54,1	59,3	59,7	60	60,4	
Number of awning pieces	7	7	7	7	7	7	7	7	7	7	9	9	9	9	9-11

## Technical details:

### Poles:

Fino 240: steel poles, Ø 25 x 1 mm  
 Fino 300: steel poles, Ø 28 x 1 mm  
 Each with Powergrip and canopy reinforcement

### Awning depth:

Fino 240 : approx. 240 cm  
 Fino 300: approx. 300 cm

### Roof:

TC-RESIDENTIAL  
 Metallic - coated on outside. Inner side with decorative print. Reduced condensation formation. Fino 300 with seam.

### Side wall:

TC-TOURING 240  
 Coated on outside. For a pleasant room atmosphere.

### Front wall:

TC-TOURING 240  
 Coated on outside. For a pleasant room atmosphere.

Info-Profile page 52 →

# TARIFA 240 / TARIFA 280

Roof and side walls made from PVC-coated material.



Photo size 21

## The benefits to you:

- The 5 individual sections (roof and 2 removable front wall and side sections) enable assembly and dismantling in stages.
- All windows with additional covers and side zip fastener attachments.
- The ventilation gauze of the side wall windows is equipped with additional rain protection film.
- All sizes with symmetrical front wall windows, size 16 is supplied as 9-piece with 6 front wall elements.



▲ ... optional positioning of the front entrance thanks to exchangeable front wall halves.



▲ ... can also be used as a complete or partial sunroof.



▲ ... with all window flaps closed. The side fabric covers are attached by zip-fasteners.


... front wall element with roll-up door!



## TARIFA

Robust PVC material in the roof and side walls, front wall of active-breathing TenCate fabric. Interesting alternative for seasonal and stationary camping. The two front wall elements are interchangeable, with variable door position either to the left of centre or at the ex-

... treme right. All windows with flaps. The ventilation gauze of the side wall windows is equipped with additional rain protection film. The Tarifa 280 is equipped with a strong 28 mm x 1 mm diameter steel pole as standard.

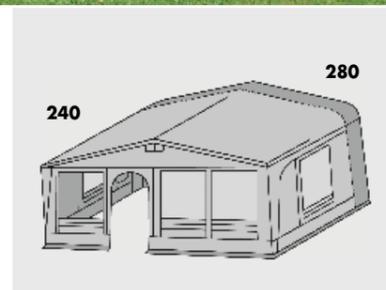

▲ Available in 2 awning depths (240 cm or 280 cm).

## Sizes available

Sizes available	09	10	11	12	21	13	31	14	41	15	16
A-Measurement in cm	850-876	877-897	898-917	918-938	939-958	959-977	978-1001	1002-1025	1026-1051	1052-1075	1076-1095
Approx. weight in kg	48	52,5	53	53,5	54,5	55,1	55,3	57,3	58,3	59,1	63,3
Number of awning pieces	5	5	5	5	5	5	5	5	5	5	9

## Technical details:

⌄ Poles:

Tarifa 240:  
Steel poles,  
Ø 25 x 1 mm.

Tarifa 280:  
Steel poles,  
Ø 28 x 1 mm

☐ Awning depth:

approx.  
240 cm or 280 cm

⌄ Roof:

PVC - coated on both  
sides. No seam.

☐ Side wall:

PVC - coated on both  
sides.

☐ Front wall:

TC-TOURING 240  
Coated on outside.  
For a pleasant room  
atmosphere.

Info-Profile page 52 →

# RIOGRANDE 240 / RIOGRANDE 280

An affordable and comfortable element awning.



Photo size 21

## The benefits to you:

- All front wall elements are exchangeable.
- The heavy-duty zip-fasteners on the front and side walls are fitted with weather-protection covers.
- Top ventilation can be closed. Fast adjustment to all weather conditions by panorama comfort windows.
- Frame: steel poles, 28 x 1 mm, with PowerGrip system and canopy reinforcement.



▲ ... front entrance to the right. Entrance in left side wall open.



▲ ... entrance to the left. 2 elements folded back to balcony trim (balcony poles: see accessories). Entrance in side wall.



▲ ... with all window flaps closed. Annex as option.


## RIOGRANDE

Let us specify the arguments: All front wall elements are exchangeable. Variable seating corner and front entrance. All windows with flaps. The heavy-duty zip-fasteners on the front and side walls are fitted with weather-protection covers.

Fast adjustment to all weather conditions by the panorama-comfort windows. Equipped with strong 28mm steel poles and canopy reinforcement. Riogrande 240 with a depth of 240 cm, Riogrande 280 with a depth of 280 cm.



▲ Available in 2 awning depths (240 cm or 280 cm)

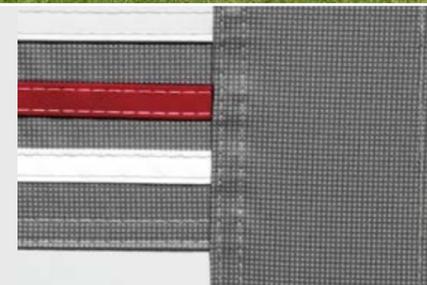

▲ ... an optical highlight: the side and front wall material is partly printed.

... available as a separate accessory; front wall element 'roll-up door'.

## Technical details:

### Poles:

Steel poles, Ø 28 x 1 mm, with PowerGrip system and canopy reinforcement.

### Awning depth:

approx. 240 cm or 280 cm

### Roof:

TC-RESIDENTIAL Metallic – coated on outside. Inner side with decorative print. Reduced condensation formation. Riogrande 280 with seam.

### Side wall:

TC-TOURING 240 Coated on outside. For a pleasant room atmosphere.

### Front wall:

TC-TOURING 240 Coated on outside. For a pleasant room atmosphere.



Fabric cover of the front wall and side wall zip-fasteners.

## Sizes available

Sizes available	08	09	10	11	12	21	13	31	14	41	15	16
A-Measurement in cm	824-849	850-876	877-897	898-917	918-938	939-958	959-977	978-1001	1002-1025	1026-1051	1052-1075	1076-1095
Approx. weight in kg	43	43,5	56	56,5	57	58	58,5	59	60	60,5	61	65
Number of awning pieces	7	7	7	7	7	7	7	7	7	7	7	9

Info-Profile page 52 →

# PALAZZO 240 / PALAZZO 280

Roof and side walls made from PVC-coated material.



PVC-Roof

Photo Palazzo 280 size 21

## The benefits to you:

- All front wall elements are exchangeable.
- The heavy-duty zip-fasteners on the front and side walls are fitted with weather-protection covers.
- Each side wall with two windows. The rear window with full-surface ventilation gauze which can be covered with a clear-film flap with zip on each side (no curtains). As additional protection, a further covering flap of PVC.
- Frame: steel poles, 28 x 1 mm, with PowerGrip system and canopy reinforcement.



▲ ... front entrance to the right. Entrance in left side wall open.



▲ ... entrance to the left. 2 elements folded back to balcony trim (balcony poles: see accessories). Entrance in side wall.



▲ ... with all window flaps closed. Annex as option.




... the side wall of the Palazzo 240 also has two windows. ▶

## PALAZZO

Robust PVC material in the roof and side walls, front wall of active-breathing Ten Cate fabric. A perfect material mix for seasonal and stationary camping. All front wall elements are interchangeable, therefore a variable door position. All windows with flaps. The heavy-duty zip-fasteners on the front and

side walls are fitted with weather-protection covers. Fast adjustment to all weather conditions by 3-piece side windows. Equipped with strong 28mm steel poles and canopy reinforcement. Palazzo 240 with a depth of 240 cm, Palazzo 280 with a depth of 280 cm.

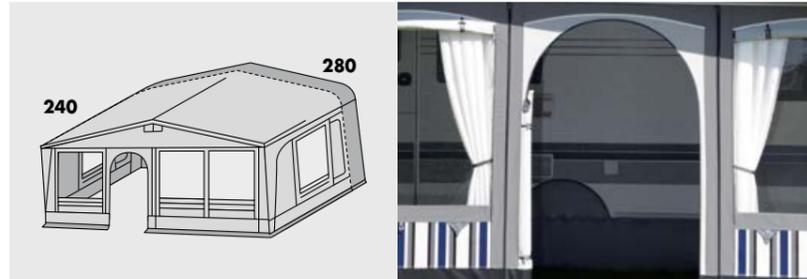

▲ Available in 2 awning depths (240 cm or 280 cm)

▲ ... available as a separate accessory; front wall element arched door with "stable door effect".

## Sizes available:

Sizes available	09	10	11	12	21	13	31	14	41	15	16	17	18	19	GX
A-Measurement in cm	850-876	877-897	898-917	918-938	939-958	959-977	978-1001	1002-1025	1026-1051	1052-1075	1076-1095	1096-1115	1116-1135	1136-1155	1156-
Approx. weight in kg	52,8	61,3	61,7	63,9	64,4	65	66,1	66,9	67,7	68,2	72	73	74	75	
Number of awning pieces	7	7	7	7	7	7	7	7	7	7	9	9	9	9	9-11

## Technical details:

⌘ Poles:

Steel poles, Ø 28 x 1 mm, with PowerGrip system and canopy reinforcement.

☐ Awning depth:

approx. 240 cm or 280 cm

⌘ Roof:

PVC - coated on both sides.

☐ Side wall:

PVC - coated on both sides.

☐ Front wall:

TC-TOURING 240 Coated on outside. For a pleasant room atmosphere.

Info-Profile page 52 →

# MAGELLAN 300

Floor depth of approx. 300 cm combined with maximum functionality.



Photo size 21

## The benefits to you:

- The interchangeable front wall elements allow variable positioning of the entrance.
- Optimum cross-ventilation thanks to large gauze windows in the side walls, which are fitted with film covers attached by zip fasteners.
- The entrance in the front part of the side wall can be positioned as required, since the 2-piece side wall offers the option of positioning the door element either on the right or left side.
- All main zips have weather-protection covers.



▲ ... front entrance to the right.



▲ ... front entrance here right to centre.



▲ ... all film windows with fabric covers, both gauze windows of the side wall with embossed film cover. Arched door in the left side wall.



▲ ... the three-metre floor depth offers plenty of space for open areas, exclusive living comfort thanks to large window areas all round.

## MAGELLAN 300

Are you looking for plenty of room, without having to forego flexible layout possibilities? Then the Magellan 300 is the right choice. The generously-proportioned window areas all round create a light and friendly living space. In case of bad weather or longer

absence, all the windows can be closed off by window flaps. The interchangeable front wall elements allow variable positioning of the entrance. The Magellan can also have a wide entrance in the right or left side wall if required.



▲ Top ventilation adjustable closing with fabric cover and zip-fasteners.

▲ The zips have weather-protection covers.

## Sizes available:

Sizes available	9	10	11	12	21	13	31	14	41	15	16	GX
A-Measurement in cm	850-876	877-897	898-917	918-938	939-958	959-977	978-1001	1002-1025	1026-1051	1052-1075	1076-1095	ab 1156
Approx. weight in kg	58,0	62,2	62,8	63,3	64,8	65,6	66	66,8	67,6	68,2	70,9	
Number of awning pieces	9	9	9	9	9	9	9	9	9	9	9	9-11

## Technical details:

### Poles:

Steel poles, Ø 28 x 1 mm, with PowerGrip system and canopy reinforcement.

### Awning depth:

approx. 300 cm

### Roof:

TC-RESIDENTIAL Metallic-coated on outside. Inner side with decorative print. Reduced condensation formation.

### Side wall:

TC-TOURING 240 Coated on outside. For a pleasant room atmosphere.

### Front wall:

TC-TOURING 240 Coated on outside. For a pleasant room atmosphere.

Info-Profile page 52 →



Photo size 21

### The benefits to you:

- The individual, exchangeable front wall elements (sizes 10-15 = 4, sizes 16-GX = 6 to 8), enable you to select the front entrance position to suit your requirements.
- Curtains in the front and side walls convey a cosy atmosphere.
- Closing top ventilation.
- Reliable steel frame  $\varnothing 28 \times 1$  mm with PowerGrip system and canopy reinforcement.



▲ ... fabric covers of all windows. Entrance element at outside right. Additional storage space with side annex (optional).



▲ ... 2 elements folded back to balcony trim (balcony poles: see accessories). Every individual element can be folded back or removed.

## CASTELLO

The classical awning with surrounding roof overhang for seasonal and stationary camping. Roof made from strong PVC-material. Heavy-duty zip fasteners with additional weather-protection covers.

Front wall with variable climate-control window (full gauze, with film and fabric cover), both side walls with panorama comfort windows: optimum ventilation possibilities.



▲ ... available as a separate accessory; front wall element arched door with "stable door effect".



▲ ... zips with weather-protection covers.

... Panorama comfort windows in both side walls. ▶



... 3-piece front window for easy climate adjustment. ▶



### Sizes available:

Sizes available	10	11	12	21	13	31	14	41	15	16	17	18	19	GX
A-Measurement in cm	877-897	898-917	918-938	939-958	959-977	978-1001	1002-1025	1026-1051	1052-1075	1076-1095	1096-1115	1116-1135	1136-1155	1156-
Approx. weight in kg	66,4	67,4	68,4	68,9	69,6	70,5	71,4	72,3	72,9	77,7	79,2	79,9	80,6	
Number of awning pieces	7	7	7	7	7	7	7	7	7	9	9	9	9	9-11

### Technical details:

#### ⌘ Poles:

Steel poles,  $\varnothing 28 \times 1$  mm, with PowerGrip system and canopy reinforcement.

#### ☐ Awning depth:

approx. 240 cm

#### ⌘ Roof:

PVC - coated on both sides.

#### ☐ Side wall:

TC-TOURING 240 Coated on outside. For a pleasant room atmosphere.

#### ☐ Front wall:

TC-TOURING 240 Coated on outside. For a pleasant room atmosphere.

Info-Profile page 52 →



Photo size 10 Side-sunroof as option.

## FORUM – a partial retraction awning.

Our partial retraction awning with a roof made of PVC offers 9 sizes for left and/or right retraction. All windows can be closed using flaps with zip-fasteners. Two large ventilation windows (½ gauze and

½ clear foil) can also be closed with window flaps. The high-spot of this awning: The entrance and the ventilation window are interchangeable and can also be used at any position in the front wall.

### Available as option:

- Sunroof with frame, 280 cm deep, 160 cm wide (can not be used under snow conditions)
- Arched door element with "stable door effect".

### Standard pole equipment:

Size 04-08: 4 frame legs, 4 roof poles  
 Size 09-14: 5 frame legs, 5 roof poles  
 (all sizes with 1 pressure pole)

You have to take the measurement from the ground through the channel cord rail up to the point where the side wall will close up with the wall of the caravan. Do not consider the canopy. An awning channel height of about 240-250 cm is recommended.

### Technical details:

#### ☐ Poles:

Steel poles, Ø 28 x 1 mm and canopy reinforcement.

#### ☐ Awning depth:

approx. 250 cm at ground level

#### ☐ Roof:

PVC – coated on both sides.

#### ☐ Side wall:

TC-TOURING 240 Coated on outside. For a pleasant room atmosphere.

#### ☐ Front wall:

TC-TOURING 240 Coated on outside. For a pleasant room atmosphere.




▲ ... side entrance next to caravan wall, two front elements folded down, entrance in left side wall opened.




▲ ... entrance in front wall, two window elements exchanged to right side wall.




▲ ... all film windows with fabric covers.



### Sizes available:



Size: 04 = 355 cm Left retraction



Size: 06 = 380 cm Left retraction



Size: 08 = 405 cm Left retraction



Size: 09 = 430 cm Right retraction  
10 = 430 cm Left retraction



Size: 11 = 455 cm Right retraction  
12 = 455 cm Left retraction




Size: 13 = 480 cm Right retraction  
14 = 480 cm Left retraction





Photo size 02-250


Available sizes:



**Pamir 01-215:**  
Width approx. 215 cm  
Depth approx. 160 cm  
Weight approx. 25,5 kg



**Pamir 02-250:**  
Width approx. 250 cm  
Depth approx. 215 cm  
Weight approx. 33,0 kg



**Pamir 03-300:**  
Width approx. 300 cm  
Depth approx. 215 cm  
Weight approx. 36,0 kg

Robust winter and travelling awning also for use in alpine regions! An all-purpose/winter awning with weather-protection canopy in robust design with a host of user benefits, and added stability thanks to the proven 'angled roof' technique and the standard 28 mm steel poles. Door zip-fasteners of both side walls equipped with fabric covers. Adjustable in height from 230 to 250 cm strip rail height. Front wall folding back to balcony trim or completely removable.

**Material:** Roof and sides completely synthetic, PVC-coated on inside and outside, washable.

**Poles:** steel poles, Ø 28 x 1 mm, Size 01: 2 legs and sizes 02 + 03: 3 legs.

**Equipment:** pegs, guy ropes, curtains, smooth-running channel cord with adapter for SHS system, storm tensioning tabs and sealing strips (2 foam cushions and pressure poles).

**Special accessories:** wheel cover, ground skirt.



## Future. Very real.

We have already liked the first drawings of Supra. Straight. Modern. For present and future. And with a lot advantages: the quarter-circle form reduces the total surface und therefore the weight. It can resist gusty winds. The ground plan in V-form provides a lot of space in the middle of the awning. Supra is equipped with 28 mm aluminium poles and the PowerGrip system.

## Standard equipment:

Each side with a large entrance and a closable ventilation window. Tinted window film, multifunction strip, foam cushions with pressure poles, wheel cover, ground skirt.

**Material:** TC-TOURING 240 – Coated on outside.

**Poles:** Aluminium poles, Ø 28 x 1 mm with PowerGrip

**Dimensions:** width 320 cm, depth 250/280 cm

**Weight:** about 26 kg

An awning channel height of 238 to 250 cm is recommended.



Large, robust equipment tent for the safe and weatherproof storage of equipment.

The approx. 145 cm wide, roll-up door offers a clearance height of approx. 180 cm. Two large top ventilation openings ensure optimum cross-ventilation. Eaves height of approx. 180 cm, centre height approx. 210 cm: plenty of room for all sorts of things which unnecessarily waste space in the caravan or awning.

**Material:** roof and sides completely synthetic, PVC-coated on inside and outside, washable.

**Poles:** steel poles, Ø 22 x 1 mm, 4 legs.

**Equipment:** pegs, guy ropes, curtains, Washable spray wall with wide, double earth strip, with multi-function strips in between for close ground attachment.



Designer Michael Studer


"The people at Brand have a high quality approach. A good condition for the development of an innovative awning like Supra."





## XPRESS

This quick-assembly tent makes a convincing alternative to roller-awnings and sunroofs. Assembled in only a few minutes, it offers real weather protection and more usage possibilities. The side walls can be folded down to form a balcony; important for ventilation in hot regions. They are also completely removable to form a stable and protective sunroof. The depth of 285 cm and width of 250 cm offer plenty of space for a comfortable corner seating area.

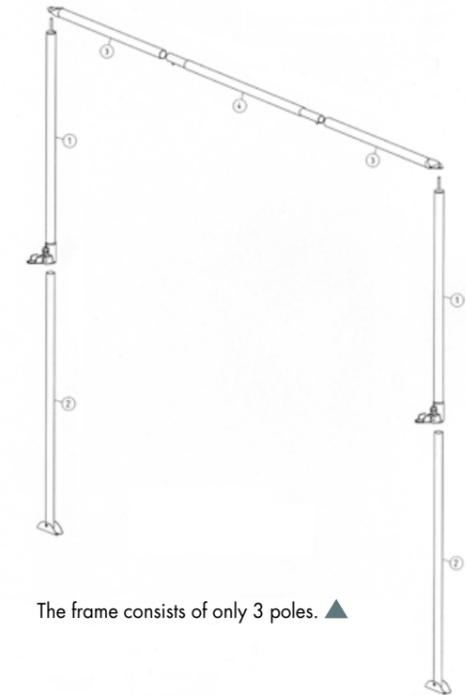

The frame consists of only 3 poles. ▲

**!** ... assembled in only 6 steps and approx. 15 minutes.



▲ Step 1: Insert the tent

▲ Step 2: Anchor the rear corners

▲ Step 3: Anchor the front corners

▼ Step 4: Insert the roof pole

▼ Step 5: Set up the tent

▼ Step 6: Tension

XPRESS



Balcony in the right side wall. ▲



Right sidewall removed, entrance in the left side wall. ▲



... wall selections removed for use as a sunroof" ▲

### TC-TOURING 240/180

Roof- and sidewall material completely synthetic, coated on outside. Reduced condensation formation! No evaporation or creation of odours.

### Poles:

aluminium poles, Ø 28 x 1 mm.

### Weight:

approx. 15 kg

### As option:

- wheel cover
- ground skirt for caravan

An awning channel height of 237 to 250 cm is recommended.



Photo size 21



▲ ... with frontwall. Curtains available at extra price.



▲ ... sunroof with seating corner protected against the wind.



▲ ... or as a simple sunroof without side sections.

## Touring Premium

A combination of a sunroof and an extra light travel awning, there is no more flexibility. The roof and the two side walls serve as the

basis, and can be extended with the aid of the front wall to form a closed tent, providing protection against strengthening wind and

rainy weather. The Touring Premium is equipped with standard 25 mm steel poles. A curtain set is available as an option.



▲ Door with stable door effect. The semicircular opening can be fitted with a mosquito net.

Standard equipment: 3 frame legs and 3 roof poles, ground skirt, wheel cover, guy ropes, pegs, riveted rings.

Accessories available at extra price:

- Aluminium poles Ø 28x1 mm with PowerGrip
- Curtain set
- SHS retaining eyes

### Sizes available:

Sizes available	08	09	10	11	12	21	13	31	14	41	15
A-Measurement in cm	824-849	850-876	877-897	898-917	918-938	939-958	959-977	978-1001	1002-1025	1026-1051	1052-1075
Approx. weight in kg	33,4	34,0	43,0	43,4	43,7	44,3	44,8	45,3	45,6	40,8	41,2

### Technical details:

<b>Poles:</b> Steel poles, Ø 25 x 1 mm 3 frame legs and 3 roof poles.	<b>Awning depth:</b> approx. 240 cm	<b>Roof:</b> TC-TOURING 180 Coated on outside. Inner side with decorative print. Reduced condensation formation. Without seam.	<b>Side wall:</b> TC-TOURING 180 Coated on outside. For a pleasant room atmosphere.	<b>Front wall:</b> TC-TOURING 180 Coated on outside. For a pleasant room atmosphere.
---	--	---	--	---



Info-Profile page 52 →

# SUNNY SD



Photo size 21  
Aluminium frame, wheel flap and ground skirt at extra price.

A shady, comfortable, approx. 235 cm-deep quality sunroof, including side sections attached by zipfasteners, an affordable price class. Easy assembly with three poles. The special sunroof fabric guarantees a minimum weight. With optionally available  $\varnothing 28 \times 1$  mm aluminium poles (weight 7,0 kg) or  $\varnothing 22 \times 1$  mm steel poles (weight 12,0 kg). If supplied with awning poles, the 3 standard 22 mm steel poles are omitted.



▲ ... a partial sunroof with one corner protected from the wind.



▲ ... remove the 2 wall sections, protected from the sun.

- Both side walls can be removed.
- With multi-function strips.
- Smooth-running channel cord for use of SHS adapter.
- Guy ropes, pegs and riveted rings.

Sizes available	08	09	10	11	12	21	13	31	14
A-Measurement in cm	824-849	850-876	877-897	898-917	918-938	939-958	959-977	978-1001	1002-1025
Approx. weight in kg	13,4	13,5	13,6	13,8	13,9	14	14,1	14,2	14,4

☞ Poles: 3 steel poles, $\varnothing 22$ mm.	☞ Awning depth: approx. 235 cm	☞ Roof: TC-TOURING 180 Coated on outside.	☞ Side wall: TC-TOURING 180 Coated on outside.
--	-----------------------------------	---	--

Available at extra price:

- Awning frame, steel poles  
22 x 1 mm (ca. 12,0 kg)
- Awning frame, aluminium poles  
28 x 1 mm (ca. 7,0 kg)
- PowerGrip
- SHS

# RONDO



*For a shady spot.*

This sunroof for all Brand arched roof awnings offers a comfortable usage depth of approx. 235 cm. Available in Brand awning sizes 09-14. The roof is attached to the three pole pins of the awning pole, and tensioned with a roof pole, a front framework pole and corresponding guy ropes.

Material: TC-TOURING 180, coated on outside.

Poles: steel poles,  $\varnothing 22 \times 1$  mm, 3 legs.

Equipment: pegs, guy ropes.

# MISTRAL

*Storm safety package*  
**MISTRAL**

Conventional storm straps lying over the tent can damage the roof fabric by abrasion. Sewn-in storm straps can place unnecessary stress on the seam and fabric areas. We provide security where the strongest wind load occurs: Optimum compensation of gusty tear and tension stresses by attachment at the pole pin of the corner brackets, and tensioning by means of strong tent pegs spiral steel springs.



The storm straps are attached to the pole pins by means of specially developed plastic adapters.

Spiral springs for protection and stability.



Photo size 21



Photo size 21

### Quickly ready for use!

Our universal awning-sunroof can be assembled in only a few minutes. In case of strong wind or rain, or longer absence, it can be quickly stowed away under the canopy (see small illustrations). The ideal complement to your camping equipment. For use with almost all Brand fully-fitted tents.

The ideal framework construction offers a host of advantages:

- to fit all Brand full-length awnings with gable and canopy in sizes 08 – 41
- quick and easy assembly thanks to the convenient framework equipment
- the special adapters and gable poles ensure an optimum fit and the necessary hold for the awning; the awning and sunroof form a compact unit.
- once fixed to the awning, no dismantling is necessary, the sunroof can simply be rolled up by two people in the event of bad weather.
- stowed under the awning canopy, the sunroof is protected against wind and rain



▲ ... the sunroof rolled up, protected against wind and rain under the awning canopy.



▲ ... the gable poles in the awning canopy hold the sunroof, and ensure a perfect fit



▲ ... 3 special adapters, pushed onto the pole brackets and then fixed in place, form the basis of this universal and compact solution. A perfect connection!

### Luxury sunroof for awnings

A classic on its own, the awning sunroof of the luxury class with two side wall elements attached by zip fasteners. Useful additional space for comfortable seating, or simply to provide shade. The proven special pole for awning sunroofs ensures the optimum fit and stable assembly. The front frame pole, three roof poles and three special adapters for attachment to the main pole of the awning provide the necessary stability. Robust Velcro fasteners on the wall elements and retaining straps on the roof element provide stability where it is needed, and also enable different usage variants. The perfect solution for almost all fully-fitted tents.



▲ ... sunroof with seating corner protected against the wind.



▲ ... Zip-fastening wall elements removed for easy assembly.

Sizes available	08	09	10	11	12	21	13	31	14	41
A-Measurement in cm	824-849	850-876	877-897	898-917	918-938	939-958	959-977	978-1001	1002-1025	1026-1051
Approx. weight in kg	12,7	12,8	15,1	15,2	15,3	15,4	15,5	15,6	15,9	16,5

#### ☞ Poles:

Ø 22 mm steel, 1 roof pole, 3 support poles, 3 special adapters, 2 gable poles.

#### ☞ Roof:

TC-TOURING 180  
Coated on outside.

#### ☞ Roof-depth:

approx. 235 cm,  
without seam

#### Standard equipment:

- Guy ropes and pegs

Sizes available	08	09	10	11	12	21	13	31	14
A-Measurement in cm	824-849	850-876	877-897	898-917	918-938	939-958	959-977	978-1001	1002-1025
Approx. weight in kg	20,4	20,6	23	23,2	23,4	23,6	23,9	24	24,2

#### ☞ Poles:

Ø 22 mm steel, 3 roof pole,  
3 support poles, 3 special  
adapters, 2 gable poles.

#### ☞ Roof:

TC-TOURING 180  
Coated on outside.

#### ☞ Roof-depth:

approx. 235 cm,  
without seam

#### ☞ Side wall:

TC-TOURING 180  
Coated on outside.

#### Standard equipment:

- Two side wall elements,  
detachable by zip fasteners,  
guy ropes, tent pegs, rivet-  
head rings.

# PARASOL HD

The parasol for use through the season




Photo size 21

## Standard equipment:

- Poles: steel tubes 25 x 1 mm with PowerGrip, 3 roof poles + 2 transverse strengtheners, 7 erecting poles, 2 clamping rods per side wall, 2 gable poles, 3 special adapters
- Two side wall elements, removable by undoing a zip.
- 3 Mistral tensioner straps
- Tent pegs and rivet-head rings.



▲ Side wall with three legs and two clamping bars in hollow seam tabs.

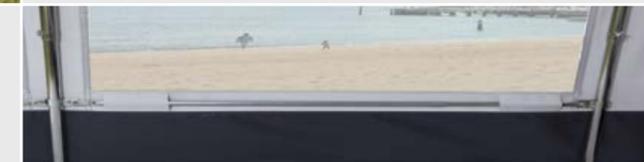


▲ The side wall and the clamping bars become a stable unit through use of the hollow seam tabs.



## Parasol HD

The HD parasol is for the camper who wants to use a parasol canopy throughout the season from spring to autumn. Essentially, its design is identical to the XL parasol. However, the materials used are suitable for use in the season. The framework is supplied in 25 mm diameter tubes and includes additional roof and side-wall poles. Note: despite the material used and the extra tensioning, a canopy of this type may not be sufficiently stable to withstand storms.

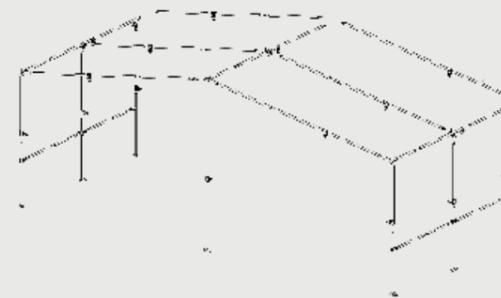

▲ Poles made from 25 mm steel pipe, with numerous roof- and side-wall poles.



▲ Additional poles are provided to stabilise the roof area.



...it is necessary to use the three Mistral storm straps. ▶



## Sizes available:

Sizes available	10	11	12	21	13	31	14	41	15
A-Measurement in cm	877-897	898-917	918-938	939-958	959-977	978-1001	1002-1025	1026-1051	1052-1075
Approx. weight in kg	40,9	41,1	41,3	41,5	41,7	41,9	42,1	42,4	42,7

## Technical details:

### Poles:

Steel poles 25 x 1 mm with PowerGrip

### Roof:

TC-Residential Externally coated.

### Roof depth:

approx 235 cm

### Side-walls:

TC-TOURING 240 Externally coated.



## Annex "Rasta"

For most of our awnings we offer the annex 'Rasta' (see table). It has an entrance in the side wall. Usable space increase of approx. 125 cm wide by approx. 230 cm deep ("Rasta 280" approx. 270 cm deep). The embossed film covers of the combined gauze-film windows are equipped with zip-fasteners at the sides. By means of the special zip-fastener system, the awning side wall can be removed, and the annex attached, in the same weatherproof way common to all Brand awnings. For retro-fitting to most models produced after 1985.

**Material:** Rasta 240 GA, Rasta 280 GA: roof and sides completely made from TC-TOURING 240. Roof with metallic coating. The roof undersides have a decorative print.

**Frame:** Ø 22 mm x 1 mm steel poles, incl. eaves stabilisation poles.

Rasta 240 GA/P and Rasta 280 GA/P: roof PVC and sides made from TC-TOURING 240

### Special accessories:

Partition wall for hanging from eaves pole

Universal sleeping compartment (210 x 120 cm)



Annex on the right	matching awning models
Annex Rasta 240 GA	Veneto, Safir TL 240, Fino 240, Riogrande 240
Annex Rasta 240 GA/P	Tarifa 240, Palazzo 240, Castello
Annex Rasta 280 GA	Safir TL 280, Fino 300, Riogrande 280
Annex Rasta 280 GA/P	Tarifa 280, Palazzo 280

An Annex is not offered for the following models:  
Arcade 240 – Arcade 280 – Magellan 300 – Forum Pamir – Supra – Xpress.



*Window awnings with aluminium poles, for protection against sun or rain!*

Made from weather resistant PVC. Dimensions approx. 180 cm wide x 80 cm deep.

Available in:

- Pattern 10: grey / blue
- Pattern 20: grey / dark grey

▲ Pattern 20




### Material:

TC-TOURING 240/180  
Roof and side wall material: Completely synthetic, coated on outside, washable. Reduced condensation formation. No evaporation or creation of odours.



- Steel poles 22 x 1 mm
- 8 legs
- Ridge height: approx. 210 cm
- Eaves height: approx. 178 cm
- Weight: approx. 53 kg



Whatever your space requirements you can adjust the front wall as required. The three compartments afford enough space for the whole family. All side windows with 1/2 ventilation gauze and 1/2 clear film. Additional film flap for rain and wind protection. Multi-function strips for weatherproof, close ground attachment.

## Brand Quality details

### The multi-function strip



The multi-function strip developed by Brand is the ideal solution for anchoring your awning tent porch securely to the ground:

- They are manufactured of material highly resistant to tearing;
- The rivet-head tensioners can be used at a spacing of 2.5 cm (1").
- Thus in important places such as the corners of the porch, several fixing points can be located in groups.
- Roots and stones in the earth are no problem. Simply place the tensioner heads in the next available slot to right or left.
- defective rivet-head tensioners can be replaced without difficulty.


Our awning models are also available with alternative special poles, depending on the model (always for an extra price). Here we provide some technical information on the special poles available:



Steel 28	Steel 32	Alu 28	Alu 32
Steel poles, 28 x 1.0 mm, incl. PowerGrip system. For use with awning depths 240 and 280 cm.	Steel poles, 32 x 1.5 mm. For 2.5 – 3 times static loading. Greater weight than standard poles. For use with awning depths 240, 280 and 300 cm.	Aluminium poles, 28 x 1.0 mm with PowerGrip System. Special for the travelling camper. For use with awning depths 240 and 280 cm.	Aluminium poles, 32 x 1.5 mm (insert section 28 x 2.0 mm). It provides the same structural stability as the proven 25 mm steel poles. For use with awning depths 240, 280 and 300 cm.


## Steel poles

We only use precision steel pipe complying with DIN EN 10305-3. All ends of poles are deburred to avoid any damage being caused to the tent fabric. After manufacture, the poles are galvanised and thick-film passivated. An additional seal guarantees hard-wearing surfaces and extremely long-lasting protection against corrosion.

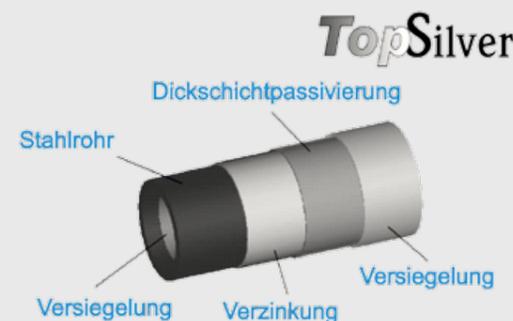

## Aluminium poles

Longitudinally-welded aluminium pipe complying with DIN 1592. The surface of the extremely light and rustless pole is anodised. Angles are made of steel or plastic. An optimum fit is guaranteed by long tapers of three times the pole diameter.



# Canopy reinforcement

A canopy reinforcement stabilises the roof area above the front wall. Using this additional pole makes very good sense when the canopy is erected for a long period and when windy weather conditions prevail.

The following models are supplied as standard with canopy reinforcement (without PowerGrip):

Arcade 240 Fino 240 Riogrande 240 Palazzo 240 Magellan 300 Castello Forum  
Arcade 280 Fino 300 Riogrande 280 Palazzo 280

Model Castello is supplied as standard with all-round canopy reinforcement.

A canopy reinforcement is available for the following awnings models for an extra price: (for sizes 05 – 09, this reinforcement consists of 4 canopy rods, and for sizes 10 – GX of 6 canopy rods and 2 spacers).

	Si. 01-09	Si. 10-GX						
<b>Veneto</b>	€ 111,-	€ 172,-	€ 162,-	€ 255,-	€ 120,-	€ 174,-	€ 213,-	€ 334,-
<b>Safir TL 240</b>	€ 24,-	€ 40,-	€ 78,-	€ 123,-	-	-	€ 128,-	€ 200,-
<b>Safir TL 280</b>	€ 24,-	€ 40,-	€ 78,-	€ 123,-	-	-	€ 128,-	€ 200,-
<b>Arcade 240</b>	€ 0,-	€ 0,-	-	-	-	-	-	-
<b>Arcade 280</b>	€ 0,-	€ 0,-	-	-	-	-	-	-
<b>Fino 240</b>	€ 24,-	€ 40,-	€ 78,-	€ 123,-	€ 39,-	€ 45,-	€ 128,-	€ 200,-
<b>Fino 300</b>	-	-	€ 57,-	€ 90,-	-	-	€ 105,-	€ 165,-
<b>Tarifa 240</b>	€ 111,-	€ 172,-	€ 162,-	€ 255,-	-	-	€ 213,-	€ 334,-
<b>Tarifa 280</b>	-	-	€ 57,-	€ 90,-	-	-	€ 105,-	€ 165,-
<b>Riogrande 240</b>	-	-	€ 57,-	€ 90,-	-	-	€ 105,-	€ 165,-
<b>Riogrande 280</b>	-	-	€ 57,-	€ 90,-	-	-	€ 105,-	€ 165,-
<b>Palazzo 240</b>	-	-	€ 57,-	€ 90,-	-	-	€ 105,-	€ 165,-
<b>Palazzo 280</b>	-	-	€ 57,-	€ 90,-	-	-	€ 105,-	€ 165,-
<b>Magellan 300</b>	-	-	€ 57,-	€ 90,-	-	-	€ 105,-	€ 165,-
<b>Castello</b>	-	-	€ 57,-	€ 90,-	-	-	-	-

	Steel 22/19 mm		Alu 25/22 mm	
	Si. 01-09	Si. 10-GX	Si. 01-09	Si. 10-GX
<b>Veneto</b>	€ 27,-	€ 52,-	€ 40,-	€ 75,-
<b>Safir TL 240</b>	€ 27,-	€ 52,-	€ 40,-	€ 75,-
<b>Safir TL 280</b>	€ 27,-	€ 52,-	€ 40,-	€ 75,-
<b>Tarifa 240</b>	€ 27,-	€ 52,-	€ 40,-	€ 75,-
<b>Tarifa 280</b>	€ 27,-	€ 52,-	€ 40,-	€ 75,-



No special poles are available for the other awnings in this catalogue.

Depending on the usage purpose, additional poles may be advisable. Whether for touring or seasonal camping: we offer additional poles in all major dimensions, along with other helpful accessories.

1. Storm support, steel Ø 25 mm, 165 – 260 cm	€ 17,70			
1a. Storm support, steel Ø 28 mm, 165 – 260 cm	€ 19,70			
1b. Storm support, steel Ø 32 mm, 180 – 260 cm	€ 24,90			
1c. Storm support, aluminium Ø 28 mm, 165 – 260 cm	€ 22,10			
1d. Storm support, aluminium Ø 32 mm, 180 – 260 cm	€ 29,80			
2. Roof pole, arched, steel Ø 25 mm, 210 – 255 cm	€ 18,60			
2a. Roof pole, arched, steel Ø 25 mm, 270 – 320 cm	€ 20,30	4a. Clamp pole, 2 clamps, steel, 120 - 205 cm for Ø 22 - 28 mm	€ 12,30	
3. Roof pole, steel Ø 25 mm, 215 – 300 cm	€ 17,40	4b. Clamp pole, 2 clamps, steel, 160 - 260 cm for Ø 22 - 28 mm	€ 15,20	
3a. Roof pole, steel Ø 28 mm, 220 – 300 cm	€ 20,40	4c. Clamp pole, 2 clamps, steel, 215 - 300 cm for Ø 22 - 28 mm	€ 16,80	
3b. Roof pole, steel Ø 32 mm, 215 – 300 cm	€ 26,90	4d. Clamp pole, 2 clamps, aluminium, 80 - 120 cm for Ø 22 - 28 mm	€ 14,50	
3c. Roof pole, aluminium Ø 28 mm, 220 – 300 cm	€ 23,60	4e. Clamp pole, 2 clamps, aluminium, 120 - 200 cm for Ø 22 - 28 mm	€ 15,90	
3d. Roof pole, aluminium Ø 32 mm, 225 – 300 cm	€ 33,30	4f. Clamp pole, 2 clamps, aluminium, 160 - 260 cm for Ø 22 - 28 mm	€ 19,60	
4. Clamp pole, 2 clamps, steel, 80 - 120 cm for Ø 22 - 28 mm	€ 10,20	4g. Clamp pole, 2 clamps, aluminium, 215 - 300 cm for Ø 22 - 28 mm	€ 21,70	



SHS

The proven SHS has been further optimised. By releasing an integrated screw by hand, the SHS eye can be opened much wider, and therefore attached more easily to the channel. Hand-tightening of the screw then ensures the optimum clamping effect.

€ 19,50 / 3 pcs  
€ 28,40 / 5 pcs



SHS-HOBBY-Adapter

For the caravans of the HOBBY range, model year 2009 and later, a corner profile has been used into which the channel rail for the awning attachment is also inset. The SHS has been adapted to these caravans by developing special attachment shoes for the SHS profiles.

€ 8,70 / 3 pcs



SHS-EXTEND

Caravan models of the KNAUS and WILK ranges from build year 2011 have been equipped with a new channel rail. In order to use our SHS eyes also for these caravan models, we have developed a new extension adapter, the SHS-EXTEND. This is simply pushed onto the SHS channel rail of the awning roof to the required position and connected to the SHS eye.

€ 16,50 / 5 pcs

## PowerGrip



In this new tensioning system, the conventional locking screws have been replaced by a clamp mechanism. The benefits for you:

- convenient, easy extension and tensioning of the poles
- no damage to the pole surface
- no deformation of the poles
- clamp mechanism without galvanised steel components
- attractive appearance

A lot of our awnings are equipped with PowerGrip as standard. For retro-fitting of steel or aluminium poles, we offer as an optional extra a retro-fit set, consisting of 15 pcs. PowerGrip.

Set 15 pcs PowerGrip for Ø 25 mm	€ 48,90	1 piece PowerGrip for Ø 25 mm	€ 4,20
Set 15 pcs PowerGrip for Ø 28 mm	€ 57,00	1 piece PowerGrip for Ø 28 mm	€ 4,80
Set 15 pcs PowerGrip for Ø 32 mm	€ 63,00	1 piece PowerGrip for Ø 32 mm	€ 5,10
5 pcs. PowerGrip for Ø 22 mm	€ 17,20		

## Storm safety package MISTRAL

Conventional storm straps lying over the tent can damage the roof fabric by abrasion. Sewn-in storm straps can place unnecessary stress on the seam and fabric areas. We provide security where the strongest wind load occurs: Optimum compensation of gusty tear and tension stresses by attachment at the pole pin of the corner brackets, and tensioning by means of strong tent pegs spiral steel springs.

A set consists of 2 pole-adaptors, 2 storm straps, 2 steel springs, 2 tent pegs.

€ 43,00



▲ The storm straps are attached to the pole pins by means of specially developed plastic adapters.



▲ Special PVC pin caps and spiral springs for protection and stability.



▲ A perfect storm safety package.

<p><b>Screw adjustor</b></p> <p>For Ø 25 mm € 11,00 / 10 pcs. For Ø 28 mm € 12,70 / 10 pcs. For Ø 32 mm € 13,40 / 10 pcs.</p>	<p><b>Pole clamp</b></p> <p>For Ø 22/25/28 mm € 11,60 / 10 pcs. For Ø 28/32 mm € 13,60 / 10 pcs.</p>	<p><b>Double pole clamp</b></p> <p>For 25 and 28 mm – frames € 8,40/ 2 pcs. For 32 mm – frames € 9,20/ 2 pcs.</p>	<p><b>Retaining eyes</b></p> <p>Made of polyethylene, for screwing onto the caravan wall horizontally.</p> <p>€ 3,50 / 5 pcs.</p>	<p><b>Anchor Rings</b></p> <p>Used for tensioning of the ground skirts.</p> <p>€ 4,50 / 10 pcs.</p>	<p><b>Curtain rings</b></p> <p>Roller rings for fixing the curtains in the curtain track.c</p> <p>€ 2,60 / 10 pcs.</p>
<p><b>Corner pole clamp</b></p> <p>For 25 and 28 mm – frames € 9,00/ 2 pcs. For 32 mm – frames € 9,50/ 2 pcs.</p>	<p><b>Spacers</b></p> <p>Steel 22/19 mm € 13,50 / 2 pcs.</p>	<p><b>Pole pins</b></p> <p>3 pole pins incl. sealing ring and cap</p> <p>€ 5,80</p>	<p><b>Pole tensioner</b></p> <p>A 7-piece set for all pole dimensions. Effortless tensioning of the fabric surface for optimum stability of your awning.</p> <p>€ 20,70 / pc</p>	<p><b>Mosquito door</b></p> <p>The door is fixed with curtain rollers in the curtain track. Of coated polyester fabric. Width: 125 cm, height: 200 cm.</p> <p>€ 44,00 / pc</p>	<p><b>Inner lining</b></p> <p>The channel cords which have been sewn into our awnings since October 1999 enable the fitting of an inner lining in all Brand full-length awnings with floor level depths of 240 cm. Delivery time is approx. 4 – 6 weeks. . (Prices for 280cm und 300cm-depth on request)</p> <p>Prices on pages 50-51.</p>
<p><b>Tensioning rings</b></p> <p>Tensioning rings (2-holes)</p> <p>€ 4,30 / 10 pcs.</p>	<p><b>Tensioning rings</b></p> <p>Tensioning rings (6-holes)</p> <p>€ 7,20 / 10 pcs.</p>	<p><b>Roof attachment set</b></p> <p>Put an end to the flapping of your awning roof in high winds. A tube of special adhesive, 3 adhesive pads and Velcro straps provide the necessary hold.</p> <p>€ 19,80</p>	<p><b>Packing bags</b></p> <p>Ideal for transport and storage. Made of high-quality, tough polyester material, with side ventilation gauze panels</p> <p>Size 01 = Bag for frames 117x28x28 cm € 29,00 / pc Size 02 = Bag for canvas 110x40x40 cm € 32,00 / pc</p>	<p><b>Ground skirt</b></p> <p>Of PVC film. Height approx. 50 cm. With PVC track and PVC eyelets welded in.</p> <p>Prices on pages 50-51.</p>	<p><b>Specail ground skirt</b></p> <p>For caravans with a lower door (Tabbert, Fendt), one standard length</p> <p>€ 56,00</p>

Page	Model	Size	04	05	06	07	08	09	10	11	12	21	13	31	14	41	15	16	17	18	19	GX *
		Measurement		748-773	774-798	799-823	824-849	850-876	877-897	898-917	918-938	939-958	959-977	978-1001	1002-1025	1026-1051	1052-1075	1076-1095	1096-1115	1116-1135	1136-1155	ab 1156
10+11	Veneto			980,-	1010,-	1020,-	1050,-	1080,-	1120,-	1145,-	1160,-	1175,-	1215,-	1240,-	1280,-	1295,-	1325,-	1515,-				
12+13	Safir TL 240						1230,-	1275,-	1330,-	1360,-	1375,-	1410,-	1455,-	1530,-	1570,-	1610,-	1675,-					
12+13	Safir TL 280						1385,-	1425,-	1490,-	1530,-	1545,-	1575,-	1630,-	1715,-	1760,-	1800,-	1875,-					
14+15	Arcade 240							1490,-	1510,-	1535,-	1575,-	1630,-	1685,-	1735,-	1790,-							
14+15	Arcade 280							1670,-	1690,-	1720,-	1765,-	1830,-	1885,-	1940,-	2010,-							
16+17	Fino 240							1410,-	1510,-	1530,-	1560,-	1590,-	1650,-	1690,-	1755,-	1795,-	1840,-	2110,-	2185,-	2225,-	2320,-	2575,-
16+17	Fino 300							1590,-	1690,-	1735,-	1760,-	1790,-	1845,-	1895,-	1930,-	1980,-	2020,-	2365,-				
18+19	Tarifa 240							1445,-	1535,-	1565,-	1595,-	1625,-	1655,-	1680,-	1720,-	1760,-	1790,-	2130,-				
18+19	Tarifa 280							1640,-	1745,-	1780,-	1815,-	1835,-	1860,-	1900,-	1945,-	1990,-	2030,-	2410,-				
20+21	Riogrande 240	Front element "roll-up door"		142,-			1810,-	1840,-	1965,-	2015,-	2055,-	2085,-	2100,-	2140,-	2180,-	2195,-	2245,-	2615,-				
20+21	Riogrande 280	Front element "roll-up door"		142,-			2030,-	2070,-	2195,-	2255,-	2300,-	2335,-	2360,-	2395,-	2445,-	2460,-	2520,-	2930,-				
22+23	Palazzo 240	Front element "arched door"		142,-				1840,-	1965,-	2015,-	2055,-	2085,-	2100,-	2140,-	2180,-	2195,-	2245,-	2615,-	2760,-	2800,-	2875,-	3230,-
22+23	Palazzo 280	Front element "arched door"		142,-				2100,-	2235,-	2295,-	2345,-	2375,-	2400,-	2440,-	2485,-	2500,-	2560,-	2985,-	3150,-	3195,-	3275,-	3680,-
24+25	Magellan 300	Window element Magellan		142,-				2270,-	2415,-	2500,-	2555,-	2610,-	2665,-	2720,-	2800,-	2850,-	2910,-	3260,-	—	—	—	4020,-
26+27	Castello	Front element Castello "arched door"		142,-					2285,-	2350,-	2390,-	2470,-	2530,-	2585,-	2630,-	2680,-	2755,-	3085,-	3175,-	3260,-	3350,-	3800,-
28+29	Forum		1830,-	—	1900,-	—	1945,-	2160,-	2160,-	2235,-	2235,-	—	2275,-	—	2275,-							
	Accessories Forum	Front element Forum "arched door"		142,-																		
30	Pamir S	Size 01: 675,-		Size: 775,-			Size 03: 855,-															Ground skirt and wheel cover 39,-
30	Depot	440,-																				Supporting frame 71,-
31	Supra	990,-																				
32+33	Xpress	610,-		Curtains - set of 2 pieces 49,-																		Ground skirt and wheel cover 39,-
34+35	Touring Premium	Curtains 79,-					940,-	980,-	995,-	1010,-	1025,-	1040,-	1055,-	1090,-	1120,-	1155,-	1185,-					Extra charge Alu 28 w. PowerGrip 89,-
36	Sunny SD						470,-	470,-	490,-	490,-	490,-	510,-	510,-	510,-	525,-							
	Frames at extra charge	Steel 22 x 1 mm		Size 08-09		82,-							Size 10-14		95,-							
		Aluminium 28 x 1 mm		Size 08-09		127,-							Size 10-14		142,-							8 pieces PowerGrip 28 mm 32,-
37	RONDO							380,-	420,-	420,-	420,-	435,-	435,-	435,-	485,-							
38	SOLAIR						380,-	380,-	420,-	420,-	420,-	435,-	435,-	435,-	485,-	485,-						
39	PARASOL XL						565,-	565,-	615,-	615,-	615,-	690,-	690,-	690,-	740,-							
40+41	PARASOL HD								795,-	825,-	840,-	855,-	870,-	885,-	900,-	920,-	940,-					
49	Inner lining deep 240 cm			208,-	208,-	222,-	222,-	222,-	244,-	244,-	244,-	266,-	266,-	266,-	285,-	285,-	285,-	310,-	310,-	310,-	310,-	340,-
49	Bodenschürzen	25 Meters 105,-		22,-	22,-	24,-	24,-	25,-	25,-	25,-	28,-	28,-	28,-	30,-	30,-	31,-	31,-	36,-	36,-	36,-	36,-	
43	Chiemsee Plus	1540,-																				
42	Annexe and accessories	Rasta 240 GA Rasta 240 GA/P 240 cm deep - right side																				530,-
		Rasta 280 GA Rasta 280 GA/P 280 cm deep - right side																				600,-
		Partition wall: - for Rasta 240 cm - for Rasta 280 cm - for Rasta 300 cm																				126,- 142,- 153,-
		Sleeping compartment																				184,-
		Window awnings with aluminium frame: - Dessin: 10 - Dessin: 20																				98,-

Prices for more accessories and frames: see page 48 and 49.

\* Size GX - delivery time about 3 - 4 weeks.

Sales prices in Euro - including VAT.

# The info profile guide

Standard equipment see also pages 4 to 9.

## Roof

Metallic coating on outside, decorative print on inside  
One-piece roof surface, without seam (PVC-roofs always without seam)

## Poles

Pole equipment: sizes 10 – GX = 5 legs (2 adjustable), 5 roof poles  
Pole equipment: sizes 05 – 09 = 3 legs, 3 roof poles  
PowerGrip system for Ø 28 mm poles  
Standard canopy reinforcement

## Front wall

Variable entrance positioning  
Arched entrance door, rolling up to side  
Straight entrance door, rolling up to top

## Windows

Film covers on side windows, closed by zip-fasteners at the sides  
Window covers on all windows, closed by zip-fasteners at the sides  
3-piece side windows: ½ ventilation gauze + film cover + fabric flap  
Panorama comfort window  
Side wall windows also with decorative curtains

## Zip-fasteners

Heavy-duty zip-fasteners  
Side wall zip-fasteners protected by fabric covers  
Outer frame zip-fasteners of front wall protected by fabric covers  
All heavy-duty front wall zip-fasteners protected by fabric covers

## General equipment

Multi-function strips for close ground attachment  
Wide interior strips, multi-function strips and exterior earth strips  
Hollow-seam tabs for fitting of canopy reinforcement (accessory)  
Hollow-seam tabs for fitting of standard canopy reinforcement  
Hollow-seam tabs in front and side walls for balcony poles for wall stabilisation  
Curtains with roller hangers  
Double curtain strip for a 2nd outer curtain  
Ground skirt, wheel cover, pegs and guy ropes  
Smooth-running channel cord with adapter for inner roof liner and SHS system  
Eaves strip for fitting of rain gutters  
Storm tensioning tabs (strong PVC parts) all round  
Top ventilation  
Top ventilation closing with zip-fasteners  
Velcro attachments for additional storm supports

## Special accessories

Steel poles, Ø 28 mm x 1.0 mm, with PowerGrip system  
Steel poles, Ø 32 mm x 1.5 mm  
Aluminium poles, Ø 28 mm x 1.0 mm with PowerGrip system  
Aluminium poles, Ø 32 mm x 1.5 mm  
Additional canopy reinforcement seth  
Matching annex 'Rasta' (see detailed description on Page 42)  
Storm supports, roof poles, clamp poles, rain gutters and further accessories (see Page 46ff)  
Inner roof lining (delivery time 4 – 6 weeks)  
SHS retaining eyes (see page 47)  
Storm safety package MISTRAL (see page 47)



# Quality facts



## Fitting

To achieve an optimum fit of the canopy, Brand only uses very small size ranges, for instance for size 31, only 23 cm (978-1001 cm).



## Metallic coating

On the majority of Brand canopies, a roofing material is used which has an additional metallic coating (TC-Touring 240 and TC-Residential). This additional coating is not merely attractive to look at; it also improves weather resistance.



## Printed interior to the roof

The decorative print inside the roof makes for a pleasant living atmosphere.



## Multi function strip

The multi-function strip developed by Brand is the ideal solution for anchoring your awning tent porch securely to the ground: The rivet-head tensioners can be used at a spacing of 2.5 cm. Thus in important places such as the corners of the porch, several fixing points can be located in groups. Defective rivet-head tensioners can be replaced without difficulty.



## Coated straps

...are weather-resistant and easy to clean.



## Fabric edges

Fabric edges enclosed in a strip. No edge seam which might tend to fray.



## Zip strength

Where walls are divided, full-length zip fastenings of an appropriate strength are used.



## Zips

Zip fasteners made to size to fit the relevant tent.



## Zips

All side wall zip fasteners are protected against wind, rain and weather effects by integral covers of high-quality tent side wall material. The edges of the fabric are enclosed in a PVC strip.

Quality.  
Tradition.  
Design.



**BESTE  
MARKEN  
2016**

**1. PLATZ**

Brand  
Vorzelte/Sonnensegel



**CARAVANING**

## *Important: Find out the correct A-Measurement*


The awning size required for your caravan should only be taken from the Brand size table. Size information of other manufacturers does not necessarily correspond to our sizes.

You can however calculate the correct awning size from the A-Measurement (awning measurement) of your caravan. To do this, park your caravan normally and lower the supports.

Measure the dimension A - B in cm using a non-elastic cord threaded through the caravan awning channel. For instance, if you measure 845 cm, this data will be found within size 08

(824 - 849 cm) in the size scales for the models in this catalogue. Since changes may occasionally be made by caravan manufacturers during the season (axles, wheels etc.), which may affect the A-measurement, we recommend that you calculate the dimension A - B and compare it with the caravan type and year dimensions given in the size table.

If you choose a floor plinth, this should be taken into account in the awning size. Your specialist dealer will be happy to advise you.

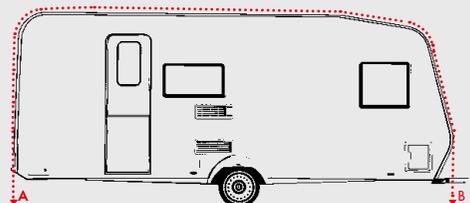

Size GX is always made to order and is a basic size for caravan awnings with circumference dimensions over 1156 cm. Delivery time: about 3-4 weeks.

**Caution: when the caravan is loaded, the height of the caravan will as a rule be altered. If the caravan is loaded, the measurement A - B must always be determined.**

*Your specialist dealer:*



### **Brand GmbH & Co. KG**

Jahnstraße 33 · 32361 Preußisch Oldendorf

Phone: (+49) 57 42 / 9 40-0

Fax: (+49) 57 42 / 9 40-66

Internet: [www.brand-camping.com](http://www.brand-camping.com)

Subject to technical amendment in the course of further development, colour changes and colour variations due to printing. All sales are subject to our delivery and payment conditions.

The illustrations in this catalogue are protected by copyright, and may not be copied or used, in whole or in part, in any way.